




MARİNE TİP AKÜMÜLATOR ŞARJ CİHAZI MBC SERİSİ



MBC 12-15/1—MBC 24-08/1

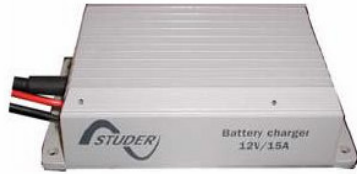

MBC 24-30/3

Model	MBC 12-15/1*	MBC 24-08/1*	MBC 24-30/3
Akümülator Voltajı (Vdc)	12	24	24
Giriş Voltajı (Vac)	100-260	100-260	83-280
Şarj Voltajı (Üst) (Vdc)	14.4	28.8	28.2 (28.8**)
Şarj Voltajı (float) (Vdc)	13.8	27.6	27.0 (27.6**)
Çıkış (Amp.)	15	8	30
Soğutma	Heat sink	Heat sink	Fan
Çıkışlar	1	1	3
Frekans	40-60 Hz	40-60 Hz	45-66 Hz
Verim	>85%	>85%	-
Çalışma Sıcaklığı	-25 ~ +50 C°	-25 ~ +50 C°	-20 ~ +70 C°
Boyutları LxWxH (mm)	195x100x47	195x100x46	272x412x127
Ağırlık (kg)	1.8	1.8	5.4
Akümülatör Kapasitesi	45-150 Ah	24-80 Ah	-
İkinci Sigorta (A)	20	15	-

* Koruma Sınıfı IP65 (Suya Mukavim)

** GEL type Akümülatörler



Norm Enerji Sistemleri Ltd.
Feriköy, Civelek Sokak No: 30 Şişli 34379 İSTANBUL
tel : +90.212.231 47 79 faks : +90.212.231 24 30

gsm : +90.532.563 14 50
web : www.normenerji.com.tr
e-mail : info@normenerji.com.tr